

# Product leaflet

Product	Model No.	Ordering No.
Compressed air supply hose	SR 358	H03-3005/10/15/20/25/30
Compressed air supply hose	SR 359	H03-3105/10/15/20/25/30
Compressed air supply hose, spiral coiled	SR 360	H03-3402/04/06/08

## Product Description

Sundström compressed air hoses are tested and approved together with the following products, and are intended for use together with Sundström SR 99-1 compressed air filter. They are also the only hoses that are approved for use.

SR 200 Airline compressed air-fed mask

SR 90 Airline compressed air-fed mask

SR 307 compressed air attachment

SR 507 compressed air attachment

SR 63 compressed air-fed hood

SR 83 welding hood

**SR 358.** 9.5/15 mm plastic hose, made of polyester reinforced PVC. Oil and chemicals resistant.

**SR 359.** 9.5/18 mm rubber hose, made of polyester reinforced EPDM. Antistatic, heat resistant.


**SR 360.** 8/12 mm plastic spiral coiled hose made of Polyurethane. The surface of the hose has a coating that provides good protection against sparks, e.g. during welding.

The hoses are delivered complete with safety couplings/nipples.


## Technical specification

	SR 358	SR 359	SR 360
<b>Diameter</b>	9.5/15 mm	9.5/18 mm	8/12 mm
<b>Lengths</b>	5/10/15/20/25/30 m*	5/10/15/20/25/30 m*	2/4/6/8 m*
<b>Maximum working length</b>	-	-	2.5/5/7.5/10 m
<b>Working pressure</b>	4–7 bar	4–7 bar	4–7 bar
<b>Maximum working pressure</b>	7 bar	7 bar	7 bar
<b>Service temperature</b>	-10 – +55 °C, < 90 % RH	-10 – +55 °C, < 90 % RH	-10 – +55 °C, < 90 % RH
<b>Storage temperature</b>	-20 – +40 °C, < 90 % RH	-20 – +40 °C, < 90 % RH	-20 – +40 °C, < 90 % RH
<b>Approvals</b>	EN 14594:2005	EN 14594:2005	EN 14594:2005


\*N.B. The maximum approved lengths are 30, 30 and 8 meters respectively.

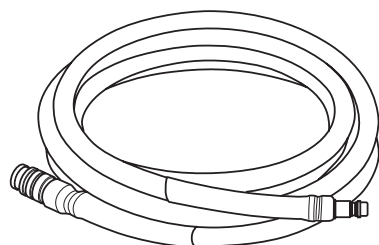

SR 358

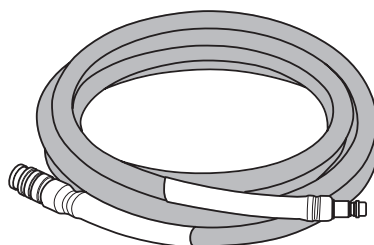

SR 359

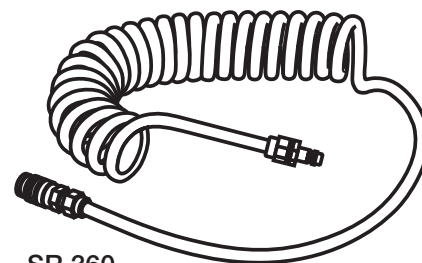

SR 360



Sundström Safety AB

Tel: +46 10 484 87 00

Västergatan 4

SE-341 50 Lagan

**Sundström**  
www.srsafety.com