

Product leaflet

Product
Gas filter AX

Model No.
SR 298

Ordering No.
H02-2412


Product Description

Gas filter SR 298 is designed for use with Sundström half masks and full face masks. The filter is of type AX and provides protection against organic gases and vapours, such as solvents, with boiling points $\leq +65$ °C. The gas filter can easily be combined with particle filter SR 510 P3 R in order to obtain protection also against aerosols (particles), e.g. during spray painting.

Technical specification

	SR 298 AX	EN 14387:2004 + A1:2008
Pressure drop at 30 l/min	≈ 95 Pa	≤ 140 Pa
Diameter/height	106/48 mm	-
Weight	≈ 185 g	≤ 300 g
Service temperature	-10 – +55 °C, < 90 % RH	
Storage temperature	-20 – +40 °C, < 90 % RH	
Resistance time		
AX, Dimethylether CH ₃ OCH ₃ , 500 ppm	> 60 min	≥ 50 min
AX, Isobutane C ₄ H ₁₀ , 2,500 ppm	> 60 min	≥ 50 min
Approval	EN 14387:2004 + A1:2008	

- A. Activated carbon
- B. Filter disc
- C. Marking label
- D. Filter case

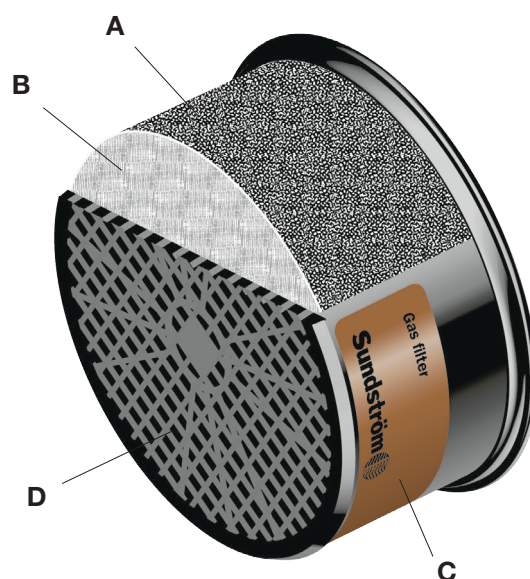

Head Office
Tel: +46 10 484 87 00

Visiting address:
Stockholmsvägen 33
SE-181 33 Lidingö

Factory
Tel: +46 10 484 87 00

Visiting address:
Västergatan 4
SE-341 50 Lagan

Sundström 
www.srsafety.com